


NOCO[®]
Since 1914

GB50 12 V **1500 A** | **7.0 L** 4.5 L
Lithium | Petrol | Diesel

NOCO BOOST[®]XL[™] JUMP STARTER

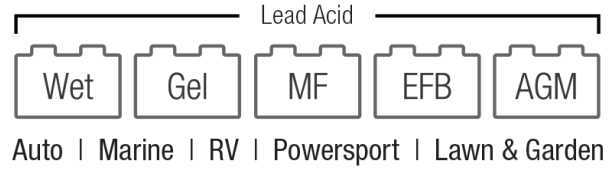

Part No.: T120016927

START DEAD BATTERIES.[™]

Diesel Cars, SUVs, Boats, Motorcycles, ATVs, Trucks & more.

UltraSafe, ultra-compact, rugged, and portable lithium-ion jump starter. Features spark-proof technology and reverse polarity protection. Instantly jump starts most single-battery applications, up to 30 times on a single charge. Ideal for a wide range of vehicles including small diesel cars, trucks and engines up to 7.0 l Petrol and 4.5 l Diesel.



SPARK PROOF

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

JUMP START
30X

Full power to jump start a vehicle up to 30 times in one charge. Compatible with engines up to 7.0 l petrol and 4.5 l diesel.

USB
CHARGE & RECHARGE

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

200 LUMENS
4XLED


The GB50 portable car battery jump starter integrates with a high-output 200-lumen LED flashlight with 6 light modes: low, medium, high, flashing, strobe, and emergency SOS.

 **0861 8797663**
TRYSOME

 **TRYSOME**
AUTO-ELECTRICAL ENGINEERING

ADVANCED PROTECTION.


Designed to protect your device.

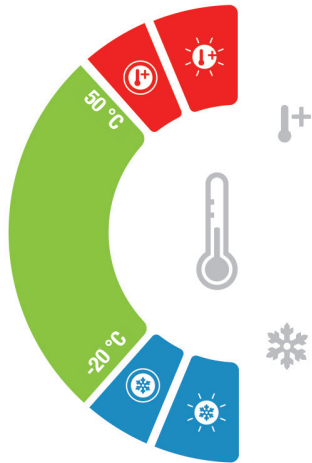

- Hot LED indicator** designed to indicate when internal battery approaches high temperatures.
 - Solid Red.** Unit is fully operational, but approaching upper temperature limit.
 - Flashing Red.** Unit is too hot to jump start, but other functions are still available.
- Cold LED indicator.** Designed to indicate when internal battery temperature is too cold to operate.
 - Solid Blue.** Unit is fully operational, but approaching lower temperature limit.
 - Flashing Blue.** Unit is too cold to jump start, but other functions are still available.

Error LED Illuminates Red if reverse polarity is detected.

Manual Override is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.

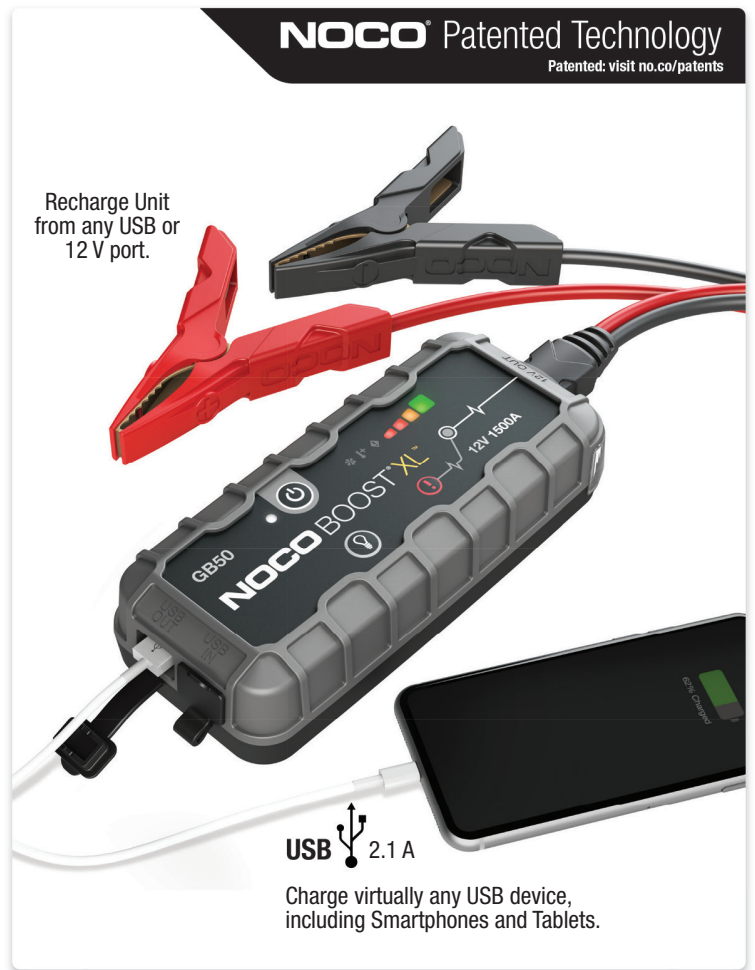

TECHNICAL SPECIFICATIONS


Internal Battery:	35 Watt-Hour Lithium Ion	Housing Protection:	IP65 (w/ Ports closed)
Peak Current Rating:	1500 A	Cooling:	Natural Convection
Operating Temperature:	-4 °F to +122 °F (-20 °C to +50 °C)	Dimensions (LxWxH):	218 x 86.4 x 48.3 mm
Charging Temperature:	32 °F to +104 °F (0 °C to +40 °C)	Unit Weight:	748.43 g
Storage Temperature:	-4 °F to +122 °F (-20 °C to +50 °C)	Unit Weight w/Clamps & Accessories:	1229.24 g
Micro USB (Input):	5 V, 2.1 A	LED Flashlight Brightness:	200 Lumens
USB (Output):	5 V, 2.1A		

RECHARGING A GB150 (for reference, results may vary)

USB Charger Rating	Charging Time
0.5 A	18 hr
1 A	9 hr
2 A	4.5 hr

WHAT'S IN THE BOX

- GB50 Lithium Jump Starter
- Heavy-Duty Battery Clamps
- 12 V Car Charger
- Micro USB Cable
- Microfibre Storage Bag
- User Guide

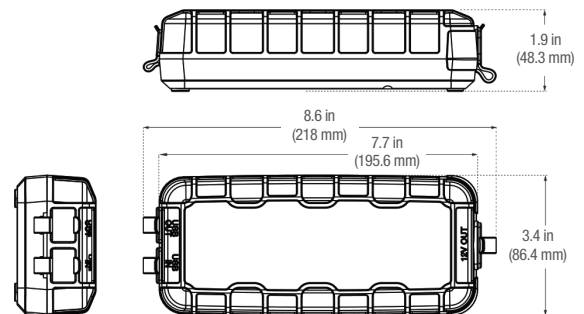

This may not be a stock item. Please speak to our sales representative about lead times. Lead times, price and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.

- | | | | |
|---|------------------------------|------------------------------|------------------------------|
| South Africa, Gauteng, Jet Park - Head Office: | T: +27 (0)11 823 5650 | | |
| KwaZulu Natal: | T: +27 (0)31 303 4129 | Mpumalanga: | T: +27 (0)13 692 8132 |
| Northern Cape: | T: +27 (0)53 723 3415 | Free State: | T: +27 (0)63 257 0505 |
| North West: | T: +27 (0)14 596 5257 | Western Cape: | T: +27 (0)21 945 1453 |
| | | Botswana, Gaborone: | T: +267 399 4150 |
| | | Botswana, Jwaneng: | T: +267 588 7617 |
| | | Botswana, Letlhakane: | T: +267 297 8568 |
| | | Mozambique, Tete: | T: +258 252 20666 |
| | | Zambia, Kitwe: | T: +26 (0)21 222 5338 |

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467

Call us today!
TRYSOME
AUTO-ELECTRICAL ENGINEERING