

12 V | 1 000 A

NOCO[®]
GB40 BOOST[®] PLUS[™]



START DEAD BATTERIES. ULTRASAFE LITHIUM JUMP STARTER.[™]

PETROL & DIESEL

UP TO 6.0 L GAS & 3.0 L DIESEL

Designed for petrol engines up to 6 litres and diesel engines up to 3 litres. For cars, boats, lawn mowers, and more.

USB

CHARGE & RECHARGE

Its internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and it can be recharged by any powered USB port.

20X

UP TO 20 JUMP STARTS

Compact yet powerful lithium jump starter rated at 1000 amps. Full power to jump start a vehicle up to 20 times on a single charge.

ULTRA SAFE

SPARKPROOF TECHNOLOGY

Safely connect to any 12-volt car battery with our mistake-proof design featuring sparkproof technology and reverse-polarity protection.

NOCO[®]

0861 8797663
TRY SOME

LEAD ACID

WET	GEL	MF	EFB	AGM
-----	-----	----	-----	-----

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

TRY SOME
AUTO-ELECTRICAL ENGINEERING



INTERFACE

POWER LED

The jump starter is in standby, or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

It illuminates white when the boost is active. The LED flashes white when the manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Illuminates Red if reverse polarity is detected. Blinks "On" and "Off" in various sequences to convey error conditions.




MANUAL OVERRIDE


Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter manual mode.



WHAT'S IN THE BOX

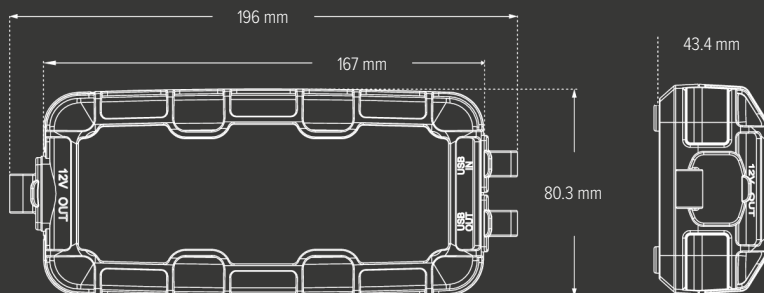

*Accessories not to scale with GB40

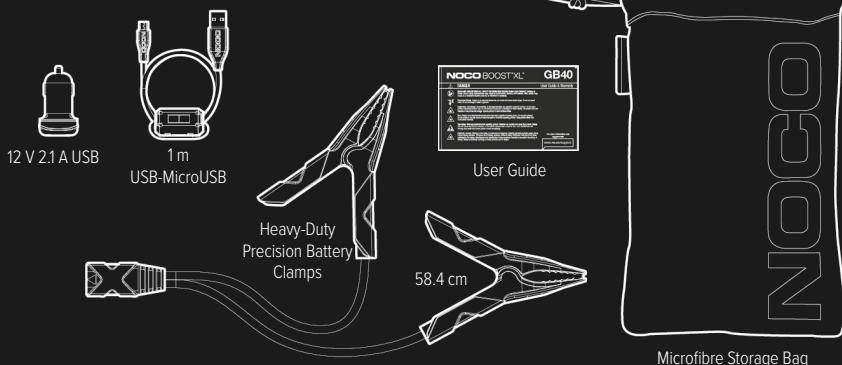

CHARGE DEVICES

Recharge your personal devices on the go, like smartphones, tablets, e-watches, and more - up to 4 smartphone recharges.

RECHARGE TIME

0.5 A	12 hr
1 A	6 hr
2 A	3 hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	24 watt-hour Lithium Ion
PEAK CURRENT RATING:	1 000 A
OPERATING TEMPERATURE:	-20 °C TO +50 °C
CHARGING TEMPERATURE:	0 °C TO +40 °C
MICRO USB (INPUT):	5 V, 2.1 A
USB (OUTPUT):	5 V, 2.1 A
HOUSING PROTECTION:	IP65 (with ports closed)
COOLING:	Natural Convection
UNIT WEIGHT:	0.74 kg
UNIT WEIGHT WITH CLAMPS & ACCESSORIES:	1.08 kg
LED FLASHLIGHT:	100 Lumens



This product may not be a stock item. Please speak to our sales representative about lead times. Lead times, price, and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.

Gauteng - Jet Park (HQ):

T: +27 (0)11 823 5650

Free State - Bloemfontein:

T: +27 (0)63 257 0505

Eastern Cape - Port Elizabeth:

T: +27 (0)82 450 6596

KwaZulu Natal - Pinetown:

T: +27 (0)31 303 4129

Mpumalanga - Middelburg:

T: +27 (0)13 692 8132

Northern Cape - Kathu:

T: +27 (0)53 723 3415

North West - Rustenburg:

T: +27 (0)14 596 5257

Western Cape - Cape Town:

T: +27 (0)21 945 1453

Botswana, Gaborone:

T: +267 399 4150

Botswana, Letlhakane:

T: +267 297 8568

Mozambique, Tete:

T: +258 252 20666

Zambia, Kitwe:

T: +26 (0)21 222 5338



SCAN HERE to
subscribe and
receive our
latest product
news.

Follow us...



Call us today!
TRYSOME
AUTO-ELECTRICAL ENGINEERING

Delivering Optimal **Uptime!**

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467