

## N100F HID

The Nordic N100F HID is a rectangular flush-mount worklamp allowing unobstructive fitment to vehicle panels, tool boxes and service bodies. These flush-mount lamps utilise an externally mounted ballast with anti-vibration, stand-off mounts to ensure protection from shock and vibration.

The Nordic N100F HID can be mounted at 0° or using the supplied 27° housing. This allows flexible fitment to vehicle applications where a high light intensity is required.



### Features

- Bulb: 34W D1S
- Voltage: 12V 24V
- Input Current: 3.0A 1.5A
- Ballast: External
- Connector: Free Lead
- Mount: Flush / Panel Mount
- Lens: Hardened Glass
- Body: Polyamide
- Weight: 0.76kg + 0.56kg Ballast
- IP Rating: IP67 (Ballast & Connectors only)
- Operating Temp.: -40°C to + 85°C
- Colour Temp: 4250K




Heavy-duty 35W D1S Xenon discharge bulb.



27° & 5° angled housing & gasket supplied as standard




Leads fitted with IP67 rated connectors

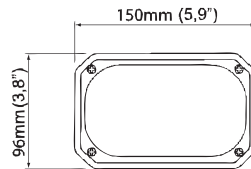


### Lighting Patterns N100F HID


lux

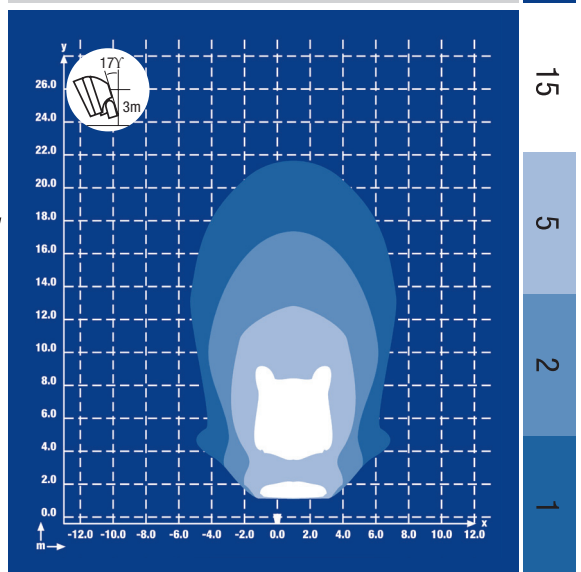

Wide Flood

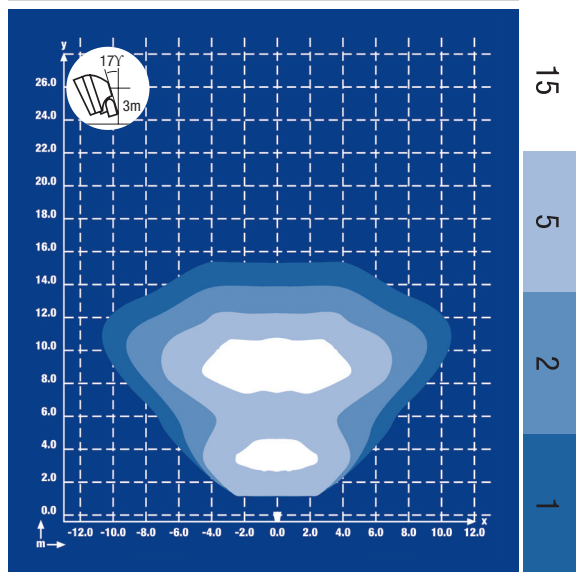

Flood

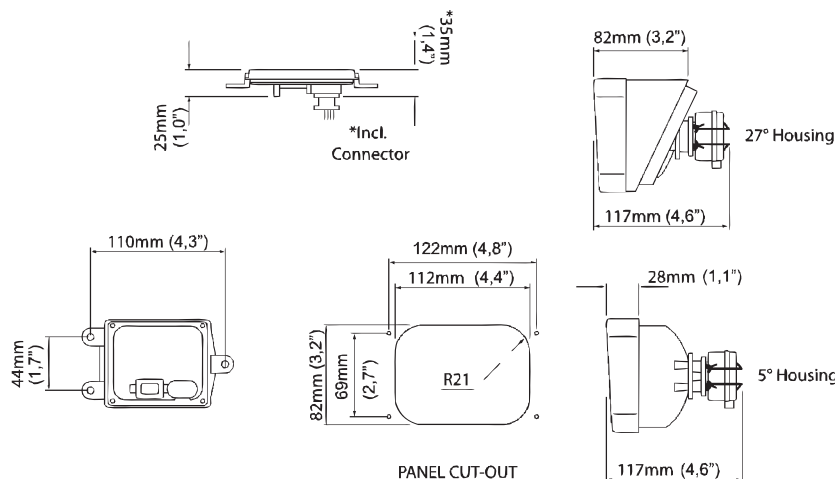

Part no.	Volts	Watt	Light Pattern	Connection
----------	-------	------	---------------	------------

T.B.A.