



With award winning Swedish technology, the dual input D250SA can draw its power from smart alternators and other DC sources, making it the ideal charger for vehicles that don't have access to a mains power supply. Its dual input capability means it can draw power from solar and wind sources, in parallel to the alternator.

The D250SA is a fully automatic, 5-step charger that supplies up to 20 A of power to charge, condition and maintain any 12 V lead acid service battery from 40 - 300 Ah, including WET, MF, GEL, AGM, EFB and Ca/Ca.


The D250SA uses patented technology so it's safe for you and your vehicle's electronics. It's also IP65 classified (splash and dust proof, and suitable for outdoor use) and comes with a 2-year warranty.

Features

- 5-step charging from smart and conventional alternators and DC sources, such as solar and wind
- Automatic battery separator works without the need for diodes or VSR relays
- Selectable AGM mode for AGM batteries
- Parallel input from both alternator and solar panel
- Solar panel regulator with Maximum Power Point Tracking (MPPT)
- Starter battery maintenance charging when your service battery is fully charged

On-Board Systems

D250SA and SMARTPASS 120 can be used independently but work best together when combined for service batteries larger than 100 Ah.

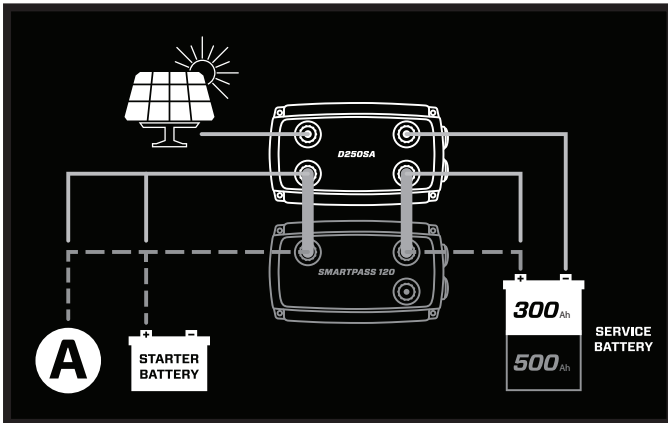

Benefits

- Continuous, fully automatic charging while you're on the move for maximum performance, battery life and convenience
- Compatible with smart alternators
- Protects, charges and maintains your starter battery – even if the engine is not running – and charges service batteries from your starter battery without the risk of starting problems
- Fast charging from the alternator and other DC sources – even on short journeys
- Automatic energy management in a single, easy-to-use unit – no need for traditional diodes or VSR relays
- Environmentally friendly charging with solar or wind

Faster Charging

The D250SA automatically delivers the optimum charge so your batteries are fully charged in the shortest possible time. You can select normal or 14.7 V AGM charge voltages. It also has a temperature sensor to compensate for hot or cold conditions and avoid the risk of your battery overheating or overcharging.

Technical Specification

Input	11.5–23 V, 25 A
Output	Max 14.4 V (14.7 V in AGM), 20 A
Back Current Drain	Less than 1 Ah/month
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Battery Types	All types of 12 V lead-acid batteries (WET, EFB, Ca/Ca, MF, AGM and GEL)
Battery Capacity	40–300 Ah
Dimensions	192 x 110 x 65 mm (L x W x H)
Insulation class	IP65 (splash and dust proof)
Part No.	T26001561298
OE No.	40-186

Direct Connection for Solar Power

The D250SA has an input for connecting solar panels without the need for a regulator. It also features a Maximum Power Point Tracker (MPPT) to get the maximum power out of your solar panels.

Smart Alternator Compatibility

Vehicle manufacturers are now introducing smart ECU (Engine Control Unit) controlled alternators to increase fuel efficiency and lower emissions. Smart alternators deliver a variable output and are shut off when they're not needed.

The D250SA will still operate even if the smart alternator is shut off and maintain a stable output of up to 20 A to fully charge your battery in the shortest time.

GUARANTEED QUALITY WITH CTEK

CTEK customer support is available to answer any questions related to charging and CTEK chargers. Safety, simplicity and flexibility characterizes all products and solutions developed and sold by CTEK. CTEK supplies chargers to more than 60 countries throughout the world. CTEK is also a reliable OEM supplier to many of the world's most prestigious car and motorcycle manufacturers.

This may not be a stock item. Please speak to your sales representative about lead times. Lead times, price and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.

Gauteng (HO):

T: +27 (0)11 823 5650

KwaZulu Natal:

T: +27 (0)31 303 4129

Northern Cape:

T: +27 (0)53 723 3415

North West:

T: +27 (0)14 596 5257

Mpumalanga:

T: +27 (0)13 692 8132

Western Cape:

T: +27 (0)21 945 1453

Zambia:

T: +26 (0)21 222 5338

Mozambique:

T: +258 252 20666

Authorised Distributors:

Namibia:

T: +264 64 200566

