

NOCO® 12 V | 3 000 A

GB150



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

PETROL & DIESEL

UP TO 9.0L PETROL & 7.0L DIESEL

Designed for petrol engines up to 9 Litres and diesel engines up to 7 Litres. For cars, SUVs, trucks, boats, RVs, and more.

USB

CHARGE & RECHARGE

Its internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and it can be recharged by any powered USB port.

80X

UP TO 80 JUMP STARTS

Compact yet powerful lithium jump starter rated at 3 000 Amps. Full power to jump start a vehicle up to 80 times on a single charge.

ULTRA SAFE

SPARKPROOF TECHNOLOGY

Safely connect to any 12-volt car battery with our mistake-proof design featuring sparkproof technology and reverse-polarity protection.





INTERFACE

POWER LED

The jump starter is in standby, or the battery voltage is too low for the jump starter to detect.

POWER BUTTON

Push to turn unit "On" & "Off".

CHARGE LED

Indicates the charge level of the internal battery.

BOOST LED

It illuminates white when the boost is active. The LED flashes white when the manual override feature is active.

VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.

LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off

ERROR

Blinks "On" and "Off" when the internal battery is too hot/too cold.

MANUAL OVERRIDE

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter manual mode.

CHARGE DEVICES

Recharge your personal devices on the go, like smartphones, tablets, e-watches, and more - up to 6 smartphone recharges.


RECHARGE TIME

0.5 A	12 hr
1 A	6 hr
2 A	3 hr


TECHNICAL SPECIFICATIONS

INTERNAL BATTERY	88 watt-hour lithium ion
PEAK CURRENT RATING	3 000 amps
OPERATING TEMPERATURE	-20 °C to +50 °C
CHARGING TEMPERATURE	0 °C to +40 °C
MICRO USB (INPUT)	5 V, 2.1 A
USB (OUTPUT)	5 V, 2.1 A
XGC (INPUT)	12 VDC, 5 A Fast Charge
XGC (OUTPUT)	12 VDC, 15 A Power Supply
HOUSING PROTECTION	IP65 (with ports closed)
COOLING	Natural Convection
UNIT WEIGHT	2.72 kg
UNIT WEIGHT WITH CLAMPS & ACCESSORIES	3.4 kg
LED FLASHLIGHT	500 Lumens

WHAT'S IN THE BOX

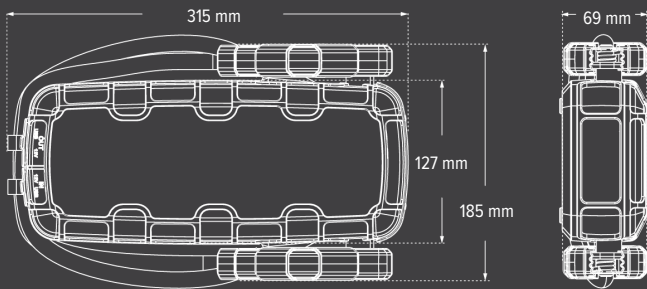

*Accessories not to scale with GB150

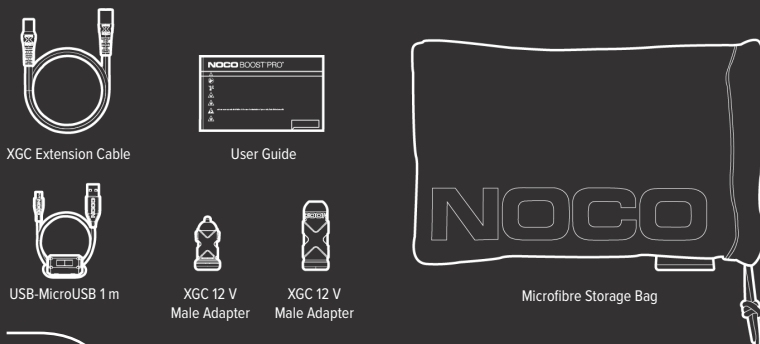

AutoTech | RiskTech | ManTech | ServTech | FleetTech | EngTech

Eastern Cape - Port Elizabeth
T: +27 (0)82 450 6596

Free State - Bloemfontein
T: +27 (0)63 257 0505

Gauteng - Bedfordview (FleetTech)
T: +27 (0)10 329 0932

Gauteng - Jet Park (HQ)
T: +27 (0)11 823 5650

KwaZulu Natal - Pinetown
T: +27 (0)31 303 4129

Mpumalanga - Middelburg
T: +27 (0)13 692 8132

Northern Cape - Kathu
T: +27 (0)53 723 3415

North West - Rustenburg
T: +27 (0)14 596 5257

Western Cape - Cape Town
T: +27 (0)21 945 1453

Botswana - Gaborone
T: +267 399 4150

Mozambique - Tete
T: +258 252 20666

Zambia - Kitwe
T: +26 (0)21 222 5338

Call us today!
TRYSOME
AUTO-ELECTRICAL ENGINEERING

Delivering Optimal **Uptime!**

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467

This product may not be a stock item. Please speak to our sales representative about lead times. Lead times, price, and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.