

NOCO[®] 24 V | 3 000 A**GB251+**

COMMERCIAL-GRADE LITHIUM JUMP STARTER.™

32L+**PETROL AND DIESEL**

It's commercial in every way. It jump starts almost every type of vehicle and equipment, including semi-trucks (up to class 8), motorhomes, coaches, buses, mining, agricultural, construction, and vocational equipment - 6, 8, 12, and 16 cylinder - and more.

**60-SECOND TIMEOUT**

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0**ULTRA SAFE 2.0**


Safe and easy to use battery jump starter pack without the worry of incorrect connections or sparks. Safely connect to any 24-volt battery with our mistake-proof design featuring sparkproof technology and reverse polarity protection.

**600
LUMENS****MULTI-FUNCTIONAL**

It's not just a lithium jump starter but also a portable power bank for recharging smartphones, tablets, and other USB devices, with an ultra-bright 600-lumen LED flashlight with seven light modes, including emergency strobe and SOS.



LEAD ACID
AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

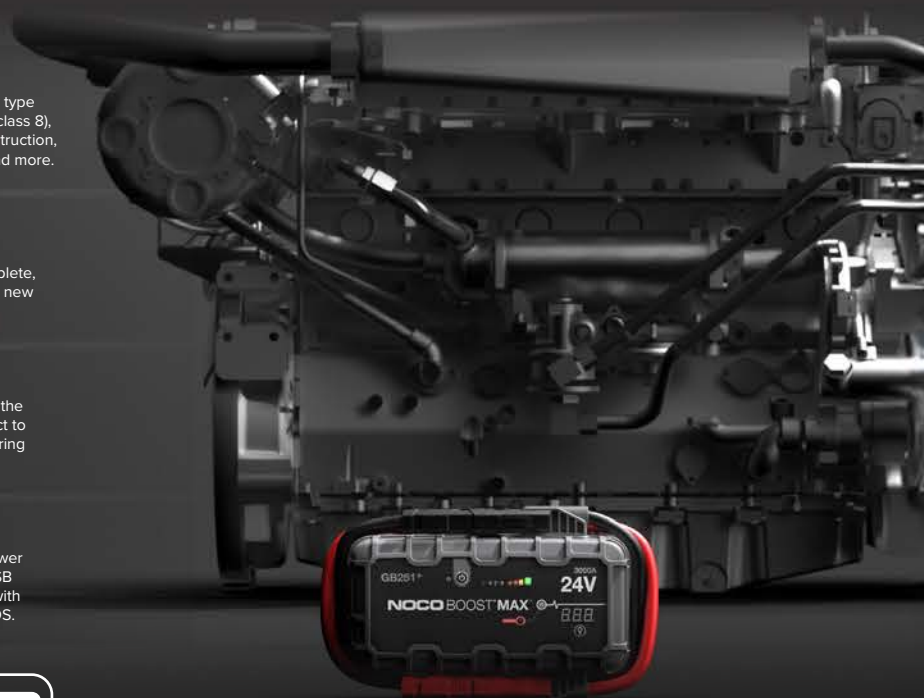



INTERFACE

POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



ERROR

Illuminates red if reverse polarity is detected. Blinks "On" and "Off" in various sequences (from 1 to 6 blinks) to convey error conditions.



HOT/COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low. Illuminates solid or flashes red when internal temperature is too high.



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.




VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.



WHAT'S IN THE BOX

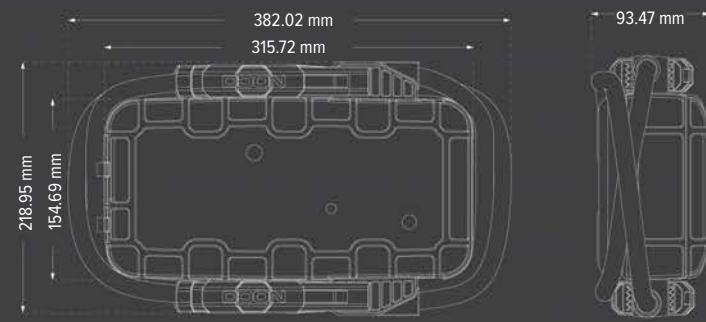

*Accessories not to scale with GB251+



USB RECHARGE

Charge virtually any USB device, including smartphones and tablets. Remote power for a wide range of 12 V devices including tyre pumps, inverters, lights, phone chargers, and more.

RECHARGE TIME: 8.5 hr

From 0-100% 4X Faster. Charge directly from the vehicle's 12-volt auxiliary port or the XGC4 4-amp Power Adapter to recharge it's 133 watt-hours lithium-ion battery in 8.5 hours.

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY	133 watt-hour lithium ion
PEAK CURRENT RATING	3 000 amps
OPERATING TEMPERATURE	0 °C to +40 °C
CHARGING TEMPERATURE	-20 °C to +50 °C
12 V (INPUT)	12 V/5 A (14 V max.)
12 V (OUTPUT)	5 V, 2.1 A max.
USB (OUTPUT)	5 V, 2.1 A max. each
HOUSING PROTECTION	IP65 (with ports closed)
COOLING	Natural Convection
WEIGHT	6.17 kg



AutoTech | RiskTech | ManTech | ServTech | FleetTech | EngTech

Eastern Cape - Port Elizabeth
T: +27 (0)82 450 6596

Free State - Bloemfontein
T: +27 (0)63 257 0505

Gauteng - Bedfordview (FleetTech)
T: +27 (0)10 329 0932

Gauteng - Jet Park (HQ)
T: +27 (0)11 823 5650

KwaZulu Natal - Pinetown
T: +27 (0)31 303 4129

Mpumalanga - Middelburg
T: +27 (0)13 692 8132

Northern Cape - Kathu
T: +27 (0)53 723 3415

North West - Rustenburg
T: +27 (0)14 596 5257

Western Cape - Cape Town
T: +27 (0)21 945 1453

Botswana - Gaborone
T: +267 399 4150

Mozambique - Tete
T: +258 252 20666

Zambia - Kitwe
T: +26 (0)21 222 5338

Call us today!
TRYSOME
AUTO-ELECTRICAL ENGINEERING
Delivering Optimal **Uptime!**

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467

This product may not be a stock item. Please speak to our sales representative about lead times. Lead times, price, and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.