

NOCO®

12 V | 1 000 A

GB40



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

PETROL & DIESEL

UP TO 6.0L PETROL & 3.0L DIESEL

Designed for petrol engines up to 6 Litres and diesel engines up to 3 Litres. For cars, boats, lawn mowers, and more.

USB

CHARGE & RECHARGE

Its internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and it can be recharged by any powered USB port.

20X

UP TO 20 JUMP STARTS

Compact yet powerful lithium jump starter rated at 1 000 Amps. Full power to jump start a vehicle up to 20 times on a single charge.

ULTRA SAFE

SPARKPROOF TECHNOLOGY

Safely connect to any 12-volt car battery with our mistake-proof design featuring sparkproof technology and reverse-polarity protection.



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The jump starter is in standby, or the battery voltage is too low for the jump starter to detect.



MANUAL OVERRIDE

Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter manual mode.



CHARGE LED

Indicates the charge level of the internal battery.



POWER BUTTON

Push to turn unit "On" & "Off".



BOOST LED

It illuminates white when the boost is active. The LED flashes white when the manual override feature is active.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Blinks "On" and "Off" when the internal battery is too hot/too cold.



CHARGE DEVICES

Recharge your personal devices on the go, like smartphones, tablets, e-watches, and more - up to 4 smartphone recharges.


RECHARGE TIME

0.5 A	12 hr
1 A	6 hr
2 A	3 hr



TECHNICAL SPECIFICATIONS

INTERNAL BATTERY	24 watt-hour lithium ion
PEAK CURRENT RATING	1 000 A
OPERATING TEMPERATURE	-20 °C to +50 °C
CHARGING TEMPERATURE	0 °C to +40 °C
MICRO USB (INPUT)	5 V, 2.1 A
USB (OUTPUT)	5 V, 2.1 A
HOUSING PROTECTION	IP65 (with ports closed)
COOLING	Natural Convection
UNIT WEIGHT	0.74 kg
UNIT WEIGHT WITH CLAMPS & ACCESSORIES	1.08 kg
LED FLASHLIGHT	100 Lumens

WHAT'S IN THE BOX

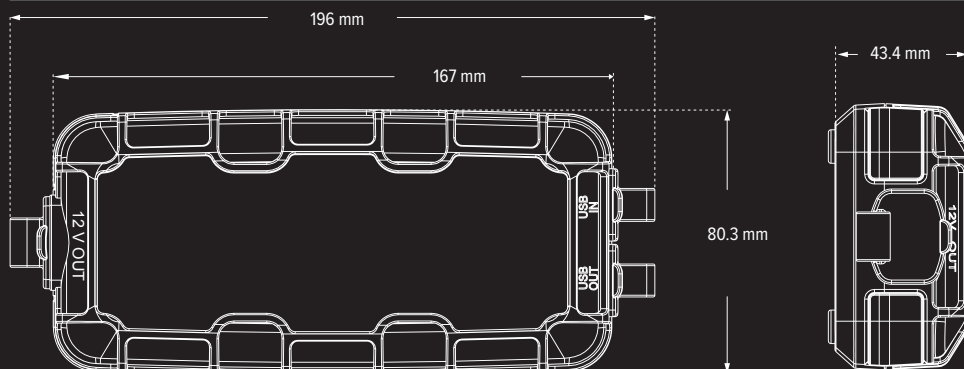

*Accessories not to scale with GB40

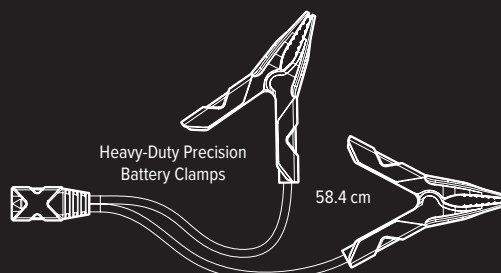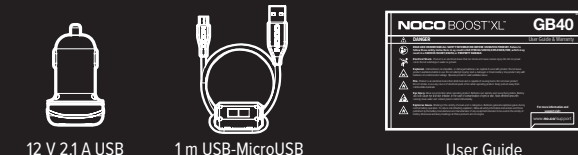

POWER SUPPLY

AutoTech | RiskTech | ManTech | ServTech | FleetTech | EngTech

Eastern Cape - Port Elizabeth
T: +27 (0)82 450 6596

Free State - Bloemfontein
T: +27 (0)63 257 0505

Gauteng - Bedfordview (FleetTech)
T: +27 (0)10 329 0932

Gauteng - Jet Park (HQ)
T: +27 (0)11 823 5650

KwaZulu Natal - Pinetown
T: +27 (0)31 303 4129

Mpumalanga - Middelburg
T: +27 (0)13 692 8132

Northern Cape - Kathu
T: +27 (0)53 723 3415

North West - Rustenburg
T: +27 (0)14 596 5257

Western Cape - Cape Town
T: +27 (0)21 945 1453

Botswana - Gaborone
T: +267 399 4150

Mozambique - Tete
T: +258 252 20666

Zambia - Kitwe
T: +26 (0)21 222 5338

Call us today!
TRYSOME
AUTO-ELECTRICAL ENGINEERING

Delivering Optimal **Uptime!**

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467

This product may not be a stock item. Please speak to our sales representative about lead times. Lead times, price, and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.