


Extends Filter Maintenance Interval by **10-20 times!**



For Extreme Environments!

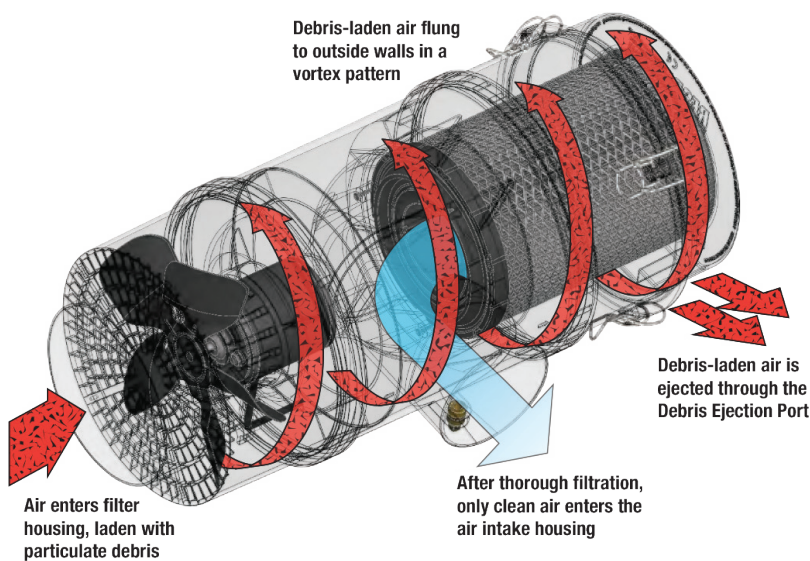

Benefits

- High-efficiency precleaning across all engine speeds
 - 90%+ precleaning efficiency
- Incorporates High-Efficiency Prefilter
 - Arrests particulate down to 0.3 micron
 - 99.99% efficient on ISO Fine Test Dust
- Lowers initial restriction
- Self-cleaning filters
- Debris falls off filter and is ejected from housing



Real World Performance: Consistent Precleaner Performance is not dependent on engine or scavenge airflows.
 • Greatly increased uptime • Reduced operating costs • Customers were completely satisfied

Compactor: Landfill

Environment:

Cat 836K Compactor running in landfill in Topeka, KS, pushing and compacting daily loads of garbage, included “problem loads” of small shredded Styrofoam and pot ash.

Before XLR Installation:

With the factory installation, average engine filter life was only 27 hours over the first 5000 hours of machine usage. The Tier 4 machine design was high in initial restriction and low in scavenge airflow, resulting in short filter life.

After Triple XLR Installation:

Reduced initial restriction, coupled with the improved and consistent precleaner performance, yielded 477 hours of XLR pre-filter life in the initial period, and up to 720 hours on later cycles.

Customer’s Response:

“Sy-Klone really knows what they are doing with engine-precleaning. The XLRs work very well to separate the debris out of the airflow. The inlet screen does not plug and all we do is just change the OEM filter as required. I am impressed with how well these work.”



Filter life increased from an average of 29 to 500+ hours

Excavator: Indoor Waste & Transfer Station

Environment:

Cat 336F Excavator working in indoor construction/demolition, waste, and transfer station in Champion City, MA., as well as a two Cat 320F excavator working in Stoughton Recycling in Stoughton, MA.

Before XLR Installation:

Challenges include heat and mixed debris including fine particulate leading to excessive machine downtime. Primary engine filters were being blown out 1-3x per day and changed weekly

After Dual XLR Installation:

XLR filters are inspected at scheduled weekend maintenance check and changed at the PM cycle of 300 hours, sometimes longer. Machine uptime has dramatically increased.

Customer’s Response:

“Very pleased!” They have installed XLR on additional machines. All have very similar performance improvements:

- Single XLR installation on Cat 320E Excavators
- Dual XLR installation on Cat 323E Excavators
- Dual XLR installation on Cat 950M Wheel Loader*



Estimated Annual Saving on 950 M: \$20 285*

This may not be a stock item. Please speak to our sales representative about lead times. Lead times, price and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.

South Africa, Gauteng, Jet Park - Head Office:	T: +27 (0)11 823 5650		
KwaZulu Natal:	Mpumalanga:	Free State:	Botswana, Letlhakane:
T: +27 (0)31 303 4129	T: +27 (0)13 692 8132	T: +27 (0)63 257 0505	T: +267 297 8568
Northern Cape:	Western Cape:	Botswana, Gaborone:	Mozambique, Tete:
T: +27 (0)53 723 3415	T: +27 (0)21 945 1453	T: +267 399 4150	T: +258 252 20666
North West:	Eastern Cape:	Botswana, Jwaneng:	Zambia, Kitwe:
T: +27 (0)14 596 5257	T: +27 (0)81 036 9111	T: +267 588 7617	T: +26 (0)21 222 5338

trading@trysome.cc • www.trysome.co.za • PO Box 13677, Witfield 1467

Call us today!
TRYSOME
 AUTO-ELECTRICAL ENGINEERING