

IP68

Whether you're looking for increased efficiency, advanced reporting, or more, Walz Scales is the solution for your business.

The **Walz AXW-30 Portable Axle Scale**, made from lightweight, high-density aluminium alloy, supports both static and in-motion weighing. Multiple seals provide protection for tough working environments such as stone-breaking factories, sand carriers, and construction sites.


The solution is multilingual, with English and Chinese as the defaults. Other languages are supported if Walz receives translations.

FEATURES


- High-definition touch screen
- With a high-speed thermal printer
- 40-hour standby battery with auto-switch-off function
- Unlimited records storage
- Running on Windows CE 6.0 with good compatibility
- Two-channel system as the default
- 4/6/8-Channel systems are optional
- RS232, USB 2.0 as the default for the Wireless Edition. USB 2.0 and Wi-Fi are the default.
- Bluetooth & USB 3.0 are optional
- Excel text or database file output
- 4-Core ARM CPU, 2 GB of memory, and a 4 GB hard disc (a higher level is optional).
- SMS messages, iOS applications, and Android applications are optional.
- The default screen size is 7". Optional 10" or 13" displays are available.

BENEFITS:

- 30 Metres of working distance for wireless version
- Data on each wheel and axle weight as well as total truck weight
- The starting logo is customisable.
- Strain gauge is based on high weighing accuracy.
- Wide weighing pads can carry the weight of up to three wheels per axle.
- Built-in overload detector with 300% overload protection.
- Built-in cable protector to avoid errors when the cable is broken.
- Built-in anti-electromagnetic interference to make sure the weighing result would not be influenced.
- Built-in auto-compensation system to compensate for weighing errors on double- or triple-joint axles.

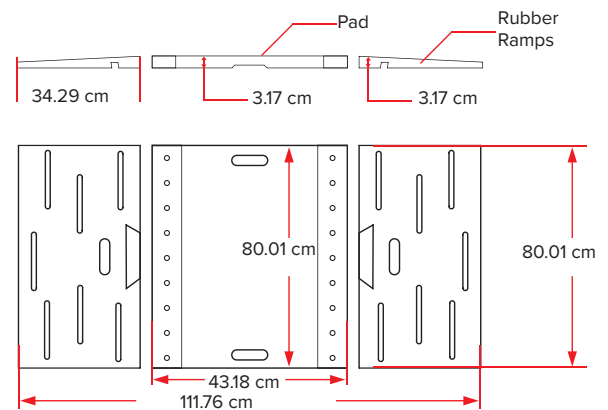


Model	AXW-30
Each Pad Dimension	80.01 x 43.18 x 3.17 cm
Each Ramp Dimension	80.01 x 34.29 cm
Max. Axle Capability (2 Pads) (Ton)	30
Load Cell	Pad is load cell, strain gauge inside.
In-Motion Speed	< 3 mph
Weighing Capacity	Wheel Weight: 15 Ton Axle Weight: 30 Ton
Static Accuracy	±1%
Sensitive	1± 0.2 MV/V
Repeatability	≤0.01% FS
Input Impedance	3 120 ±40 Ω
In-Motion Accuracy	± 3.5%
Nonlinearity	≤0.20%
Zero Output	4 ~ 10%
Output Impedance	2 800 ±10 Ω
Temperature Compensation Range	-10 ~ +50 °C
Sensitive Influence by Temperature	0.1%/10 °C
Zero Temperature Influence	0.1%/10 °C
Excitation Voltage	5 ~ 12V (DC)
Insulation Resistance	≥5 000 MΩ (100 Vdc)
Working Temperature	-40 ~ +80 °C
Overload Protection	300%
Please Note	The dimension of pads, weighing capability, and cable length are all customisable if necessary.

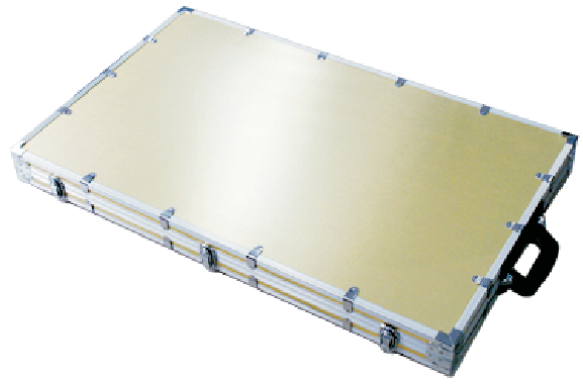

AXWT INDICATOR



Wired Version

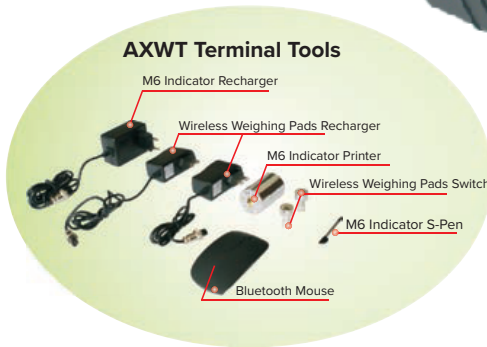

AXWT Terminal Tools

- M6 Indicator Recharger
- Wireless Weighing Pads Recharger
- M6 Indicator Printer
- Wireless Weighing Pads Switch
- M6 Indicator S-Pen
- Bluetooth Mouse



Wireless Version

- 1 Connections**
It can connect up to 6 weighing pads.
- 2 Main Board**
Running on a Windows GE 6.0 system with good compatibility. 4-Core ARM CPU, 2 GB of memory, and a 4 GB hard disc.
- 3 Display**
AXWT Indicator comes with a high-definition touch screen - 7" screen as default.
- 4 Casing**
The terminal's casing is made with military-grade material, has compression resistance, and is waterproof by sealing.

- 5 Printer**
The AXWT terminal has a built-in high-speed thermal printer. The printer receipts print at a speed of 100 mm/sec with a 202 dpi resolution.
- 6 Interface**
Hook up to a PC or a remote display through the RS232 serial interface port.
- 7 Tool Box**
Mouse, print paper, etc. can be stored inside.
- 8 Interface Connector**
Interface connectors are silver-plated German Phoenix.


INSTRUCTIONS:

- Two portable weighing pads must be on the same line.
- The longitudinal separation must be 1.5–2 times greater than the vehicle length.
- There must be no turning action within 9 metres of the weighing pads.
- There must be no acceleration or braking when the vehicle goes on or gets off the pads.
- The weighing pads must be placed on a flat, level, clean, hard surface such as concrete.

This product may not be a stock item. Please speak to our sales representative about lead times. Lead times, price, and availability can only be determined on receipt of an official quote from our supplier. This can sometimes take up to 3 days.

- | | | |
|--|---|---|
| Gauteng - Jet Park (HQ):
T: +27 (0)11 823 5650 | Mpumalanga - Middelburg:
T: +27 (0)13 692 8132 | Botswana, Gaborone:
T: +267 399 4150 |
| Free State - Bloemfontein:
T: +27 (0)63 257 0505 | Northern Cape - Kathu:
T: +27 (0)53 723 3415 | Botswana, Lethakane:
T: +267 297 8568 |
| Eastern Cape - Port Elizabeth:
T: +27 (0)82 450 6596 | North West - Rustenburg:
T: +27 (0)14 596 5257 | Mozambique, Tete:
T: +258 252 20666 |
| KwaZulu Natal - Pinetown:
T: +27 (0)31 303 4129 | Western Cape - Cape Town:
T: +27 (0)21 945 1453 | Zambia, Kitwe:
T: +26 (0)21 222 5338 |

trading@trysome.co.za • www.trysome.co.za • PO Box 13677, Witfield 1467



SCAN HERE to subscribe and receive our latest product news.



Call us today!

TRYSOME
AUTO-ELECTRICAL ENGINEERING

Delivering Optimal **Uptime!**