

PRODUCT PROFILE & PROMOTION

Delivering Optimal Uptime!

ISSUE 87 - JUL/AUG 2026

IN THIS ISSUE

Alternators	5-6	Headlights	8	Pre-Cleaners	11
Battery Chargers	3	Load Measuring	11	Safety Lights	8
Camera Systems	10	Low-Voltage Disconnect	3	Starters	4-5
Connector Kits	9	Maintenance-Free Batteries	2	Tyre-Pressure Monitoring	12
Converters	3	Marker Lights	8	Worklights	7-8

Brand names and descriptions are for reference purposes only | E&OE | Contact our sales representatives for an official quotation at online.purchases@trysome.co

TRYLEC^{XHD}

T1200127104
6885HC

Buffalo Battery — Extreme Heavy-Duty, Sealed, Maintenance-Free Battery

UNLEASH UNSTOPPABLE POWER WITH THE ALL-NEW TRYLEC^{XHD} BUFFALO BATTERY!

For those seeking unparalleled power and endurance, look no further than the Buffalo Battery. Engineered to withstand the harshest conditions and conquer the toughest terrain, this heavy-duty beast is a force to be reckoned with. Built for tough mining and earthmoving equipment, the Buffalo Battery has your back.

- 230 Ah
- SAE 1 500 CCA
- Right-Hand Post
- 13.6 kg

Built for Mining



HIGH CRANKING	EXTREME HEAVY DUTY	PUNCHING GRID	MATCHING QUALITY	VIBRATION RESISTANT	HEAT RESISTANT	SILVER (Ag) CALCIUM (Ca)

516 (l) x 275 (w) x 217 (h) mm

12V

24 MONTH WARRANTY



T011003689
8200308P
STR2127

39MT Starter

- 12 V
- 11 Tooth
- 7.3 kW
- Rotatable Flange
- Cummins/Volvo



IMS OCP
INTEGRATED MAGNETIC SWITCH OVERCRANK PROTECTION

NOCO

Since 1914

T120016929
GB150

GB150 BOOST PRO Lithium Jump Starter

- 12 V
- 56 Watt-hour Internal Lithium Battery
- Full Power to Jump a Vehicle up to 80x in One Charge
- 1.81 kg

3 000 Amp

IP65

Ultra Safe, Ultra Compact, & Portable



222 x 152 x 70 mm

1YR WARRANTY

NORDICLIGHTS

Bumblebee Headlights High Beam or Low Beam

- 12 - 24 V
- 18 w
- Built-In Deutsch Plug
- Quake Dampening
- Single Unit

90 mm



IP68 IP6K9K

5YR WARRANTY

T960-432B/434B



WARRANTY STATEMENT

Trysome warrants that all products will be covered for manufacturing faults. Trysome's warranty does not, however, extend to rectifiers, regulators, globes, fuses, or diodes.

All products supplied by Trysome are supplied and provided on the condition that we cannot be held responsible in the event that they are used for any other purpose than that specified by the manufacturer. Trysome's warranty, therefore, does not cover misuse, abuse, incorrect fitment, or application.

The customer or purchaser accepts that it is their responsibility to ensure that the product is used in accordance with the manufacturer's instructions.

The commencement date of all warranties is the date of invoice to the purchaser, unless otherwise agreed by Trysome, in writing.

For bulk discounts on premium brands contact:
Dawid.Boshoff@trysome.cc

SERVICE

Trysome has its own service department with qualified technicians so that, unlike many wholesalers, we are able to provide you, our Customer, with a complete after-sales service.

Note:

- Trysome Auto Electrical Engineering (Pty) Ltd reserves the right to change terms, conditions, and specifications shown in this catalogue at any time.
- Some names and part numbers are used for reference purposes only.
- Some of our products are manufactured to order so please allow lead times.
- The information contained herein is deemed to be correct at the time of going to print, but Trysome assumes no liability for typographical errors or omissions.
- Copyright 2026 by Trysome Auto Electrical Engineering (Pty) Ltd. All rights reserved.
- E&OE

Trysome Auto Electrical Engineering (Pty) Ltd is the authorised distributor of the brands it markets.



POWER SUPPLY

MAINTENANCE-FREE BATTERIES

TRYLEC

T1200127244
652



Red Series, Premium, Maintenance-Free Battery

- 75 Ah
- SAE 750 CCA
- Right-Hand Post
- 17.4 kg

274 (l) x 174 (w) x 190 (h) mm

12 V



TRYLEC

T1200127224
657



Black Series, Premium, Maintenance-Free Battery

- 74 Ah
- SAE 750 CCA
- Left-Hand Post
- 17.4 kg

274 (l) x 174 (w) x 190 (h) mm

12 V



TRYLECHD

T1200127145
658



Black Series, Premium, Maintenance-Free Battery

- 90 Ah
- SAE 780 CCA
- Tapered
- 21.7 kg
- Right-Hand Post

353 (l) x 175 (w) x 190 (h) mm

12 V



TRYLECHD

T124712720
674



Red Series, Premium, Maintenance-Free Battery

- 105 Ah
- SAE 800 CCA
- Post
- 25 kg

330 (l) x 173 (w) x 245 (h) mm

12 V



TRYLECHD

T1200127246
683



Black Series, Premium, Maintenance-Free Battery

- 125 Ah
- SAE 800 CCA
- Left-Hand Post
- 33.10 kg

509 (l) x 185 (w) x 223 (h) mm

12 V



TRYLECHD

T1200127147
696



Black Series, Premium, Maintenance-Free Battery

- 185 Ah
- SAE 1 200 CCA
- Tapered
- 45 kg
- Left-Hand Post

513 (l) x 223 (w) x 223 (h) mm

12 V



Please contact our sales representatives for an



CONVERTERS



T286512814
DDI12-12 036

- Converter**
- 12 - 12 V
 - 3/4 Amp
 - 36 w
 - Isolated
 - 280 g



89 x 87 x 50 mm

IP65



T286512842
PV12i-RU

- Converter**
- 24 - 12 V
 - 12/18 Amp
 - 144 w
 - Isolated
 - Ruggedised
 - 690 g



186 x 91 x 52 mm

IP65



T286512804
PV3S

- Converter**
- 24 - 12 V
 - 3/6 Amp
 - 36 w
 - Non-Isolated
 - 325 g



86 x 91 x 52 mm

IP65



T286512802
PV6S

- Converter**
- 24 - 12 V
 - 6/10 Amp
 - 72 w
 - Non-Isolated
 - 370 g



108 x 91 x 52 mm

IP65



T286512840
PV12i

- Converter**
- 24 - 12 V
 - 12/18 Amp
 - 144 w
 - Isolated
 - 590 g



167 x 87 x 50 mm

IP65



T286512803
PV24S

- Converter**
- 24 - 12 V
 - 24/30 Amp
 - 288 w
 - Non-Isolated
 - 1 050 g



236 x 91 x 52 mm

IP65

LOW-VOLTAGE DISCONNECTS

POWERTECTOR
LOW VOLTAGE DISCONNECT

Alfatronix PowerTector's monitor source voltage and disconnects the equipment from the battery if the voltage falls below a pre-determined level.

- Fully Programmable
- CE, UKCA, and E (Automotive) Marked
- Meets ISO7627-2 International Standard for 24 V Vehicles



T286512826
PT20

- PowerTector Low-Voltage Disconnect**
- 9 - 32 VDC Input
 - 20 Amp
 - 45 g



155 x 30 x 15 mm

IP65



T286512827
PT40

- PowerTector Low-Voltage Disconnect**
- 9 - 32 VDC Input (Automatic Referencing)
 - 40 Amp
 - 155 g



78 x 76 x 33 mm

IP65



T286512828
PT60

- PowerTector Low-Voltage Disconnect**
- 9 - 32 VDC Input (Automatic Referencing)
 - 60 Amp
 - 155 g



78 x 76 x 33 mm

IP65



T286512829
PT100

- PowerTector Low-Voltage Disconnect**
- Input 9 - 32 Vdc (Automatic Referencing)
 - 100 Amp
 - 530 g



97 x 124 x 51 mm

IP65

BATTERY CHARGERS



T286512832
IC124-24 144

- DC-DC Intelligent Battery Charger**
- 24 - 24 V
 - 6 Amp
 - 144 w
 - Isolated
 - 600 g



167 x 87 x 5 mm

IP63



STARTERS



T011103611
1990483P
STR2617A

42MT Starter

- 12V
- 11 Tooth
- 7.3 kW
- Direct Drive
- CAT/Cummins



T011103646
10478998
STR2642

42MT Starter

- 24V
- 11 Tooth
- 8.0 kW
- Direct Drive
- CAT/Cummins/ERF



T011003650
10479339P
STR2652

50MT Starter

- 24V
- 11 Tooth
- 9.0 kW
- Direct Drive
- CAT/Cummins/ERF



fabbro

T017915026B
2873K404
STR9017

Magneti Marelli-Type Starter

- 12V
- 10 Tooth
- 3.0 kW
- MF/JCB (Perkins-Engine)



fabbro

T0110419619B
11131781
STR7974

Iskra/Letrika-Type Starter

- 12V
- 10 Tooth
- 3.2 kW
- PLGR
- Right-Hand Open (Front View)
- Perkins



fabbro

T014700400
4280006170
STR6762

Starter

- 12V
- 11 Tooth
- 2.2 kW
- Caterpillar/CASE/ New Holland




fabbro

T012803659
2810056040
STR6024

Nippon Denso-Type Starter

- 12V
- 11 Tooth
- 2.5 kW
- OSGR
- Dyna 2.2/2.4 Diesel



fabbro

T0100150002
2280007380
STR6052

Nippon Denso-Type Starter

- 24V
- 10 Tooth
- 7.5 kW
- OSGR (Dry Clutch)
- Cummins/CASE




fabbro

T0104036104
0001241008
STR1260

Bosch-Type Starter

- 24V
- 11 Tooth
- 5.5 kW
- PLGR
- Powerstar 26/280



fabbro

T0100196160
QDJ2608F
STRX015

Starter

- 24V
- 11 Tooth
- 5.5 kW
- Diesel engines (Generators)



fabbro

T010403650
0001510035
STR1409

Bosch-Type QB Starter

- 24V
- 11 Tooth
- 9.0 kW
- Liebherr 974 Samil/Deutz/ Volvo A35



fabbro

T011103641
1990357
STR2605

Delco-Type 42MT Starter

- 24V
- 12 Tooth
- 8.0 kW
- Direct Drive



fabbro

T011919602B
03517020682
STR9861

Sawafuji-Type Starter

- 24V
- 12 Tooth
- 11 kW
- OSGR
- Komatsu PC800




fabbro

T012519625B
M009T64371
STR5162

Mitsubishi-Type Starter

- 24V
- 13 Tooth
- 5.0 kW
- PLGR
- 46 mm Gear
- Axor/Bell/ Mercedes-Benz



Please contact our sales representatives for an




STARTERS

fabbro

T015419605B
36100-23000
STR8701

Mando-Type Starter

- 12V
- 8 Tooth
- 1.2 kW
- Kia/Hyundai 1.8/2.0 l



fabbro

T0104036101B
F004A94008
STR1246

Bosch-Type Starter

- 12V
- 9 Tooth
- 2.0 kW
- Toyota 2.5D/3.0D D4D 1KD, 2KD, 1KZTE Engines



fabbro

T018803604
081382305
STR1020

Bosch-Type JF Starter

- 12V
- 9 Tooth
- 2.7 kW
- Short
- 3 Hole
- Deutz




ALTERNATORS



T021103686
8600308
ALT2668

28SI Alternator

- 12V
- 160 Amp
- J180 Mount
- Caterpillar/International/Peterbilt



T021009295
8600764
ALT2639

28SI Alternator

- 24V
- 100 Amp
- 5 Pin (W-L-IG-S-DFM)
- Mercedes Benz



T021103677
8600398
ALT2219

36SI Alternator

- 24V
- 105 Amp
- J180 Mount
- CAT/Cummins/Komatsu/Volvo Industrial Applications



T021009297
61000853
ALT2685

40SI Alternator

- 24V
- 160 Amp
- J180 Mount
- International Truck Engines/Volvo/CAT/Freightliner



WAI

High-Performance Rotating Equipment for a Dynamic Aftermarket!



T021003634B
10459279
ALT2669

Delco-Type 35SI Alternator

- 12V
- 135 Amp
- Pad Mount
- Caterpillar/Freightliner



T022803605
27060-78300
ALT6039

Nippon Denso-Type Alternator

- 24V
- 20 Amp
- 2 Pin (L-G)
- Toyota Forklift/1Z Engine



fabbro

T022809201
27060-75150
ALT6052

Nippon Denso-Type Alternator

- 12V
- 70 Amp
- 3 Pin Oval (S-IG-L)
- 5-Groove Pulley
- Hilux 2.0/2.7



fabbro

T022809234
27060-21150
ALT6131

Nippon Denso-Type Alternator

- 12V
- 80 Amp
- 4 Groove
- 4 Pin (L-IG-M-S)
- Yaris



fabbro

T028909258
2542927A
ALT0077

Valeo-Type Alternator

- 12V
- 80 Amp
- 4 Groove
- Micra MK12



fabbro

T020409253
0123315503
ALT1301

Bosch-Type Alternator

- 12V
- 90 Amp
- Iveco Daily




fabbro

T022809252
27060-27030
ALT6303

Nippon Denso-Type Alternator

- 12V
- 120 Amp
- 4 Pin (IG-S-L-M)
- Toyota Corolla/Avensis 2.0 D4D





ALTERNATORS

fabbro

T020409310
0124515050
ALT1239

Bosch-Type NCB1 Alternator

- 12V
- 120 Amp
- Fan: Internal Regulator-2 Pin (IG-L)
- 6 Groove
- BMW 320/325/330/520/X5/Z3




fabbro

T022509214B
1812005902
ALT5053

Mitsubishi-Type Alternator

- 24V
- 50 Amp
- 2 Pin (L-S)
- Hitachi EX850/ Isuzu Excavator



fabbro

T020409209
0120469008
ALT1173

Alternator

- 24V
- 55 Amp
- 56 mm Double Foot
- Deutz/KHD/ Liebherr/ Powerstar



fabbro

T027909213B
11203399
ALT7904

Iskra/Mahle-Type Alternator

- 24V
- 55 Amp
- Deutz/KHD



fabbro

T027909211B
IA1031
ALT7969

Iskra/Letrika-Type Alternator

- 24V
- 80 Amp
- Double 56 mm Foot
- Deutz/Normet



fabbro



T020403655
0120468114
ALT1114

Bosch-Type N1 Alternator

- 24V
- 80 Amp
- 50 mm Foot
- No Pulley
- Volvo A35/ MAN



fabbro

Bosch-Type Alternator

- 24V
- 110 Amp
- 8 Groove
- 5-Pin (W-L-15-S-DFM) Oval Plug
- Feet 105 mm Apart
- Volvo FM/FH



T020409237B
0124655013
ALT1277

fabbro

Mando-Type J1 Alternator

- 24V
- 150 Amp
- Mercedes-Benz HD10LPB



T0204092291
0124655072
ALT1647

Working in hazardous environments requires safety to be the highest priority. Our products help increase safety across the entire automotive value chain.



Scan this code for more information.



We are the largest supplier of...



BACK-UP ALARMS



WHEEL NUTS



ROPS



FLAGS



FIRST AID KITS



WHEEL CHOCKS



FIRE EXTINGUISHERS



WARNING TRIANGLES



Please contact our sales representatives for an

WORKLIGHTS



THE SCORPIUS XTR 3500 AND 4500 ARE IN A LEAGUE OF THEIR OWN

A rugged, high-performance lighting solution that outshines the competition in durability, efficiency, and reliability — now with new 3500 and 4500 models replacing the 4401.

Trusted across demanding mining sectors.

- **24 V Only** (Reducing the potential risk of theft)
- Glass Lens
- Built-In Deutsch Plug
- Quake Dampening

Coloured Bezels for Easy Identification

- Zero Glare → Orange
- High Beam → Grey

(Ensures the correct lens is always fitted in the right location.)

NEW

T184-9009T
T184-9013T


IP68
IP6K9K



T184-9009T
Scorpius XTR 4500 Worklight
High Beam
• 40 w
• Top-Top Pedestal



T184-9013T
Scorpius XTR 3500 Worklight
Glare Free
• 50 w
• Top-Top Pedestal

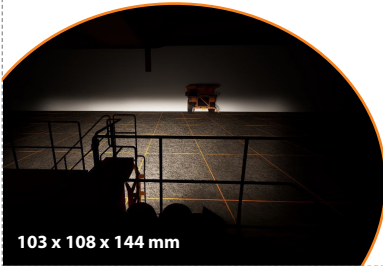

103 x 108 x 144 mm



Scorpius Blue 400 Crop-Sprayer LED Spot Light
Pencil Beam

- **12 - 24 V**
- 42 w
- For Agricultural Markets
- Maintains 10 lux for 80 m
- 400 Lumens

Key Features


- Optimised illumination of boom and spray pattern
- Light colour blue, 475 nm
- Superior electromagnetic compatibility (CISPR 25 Class 5)

108 x 108 x 87 mm



T984-801B

IP68
IP6K9K

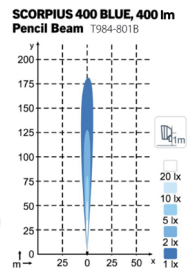

T988-203B

Scorpius Go 420 LED Worklight
Flood Beam

- **12 - 24 V**
- 28 w
- Built-in Deutsch Plug
- 9 LEDs
- 2 000 Lumens

118 x 99 x 66 mm



T982-801B/2B

KL1401 LED Worklights
Wide or Flood Beam

- **12 - 24 V**
- 42 w
- Built-in Deutsch Plug
- Top-Top Pedestal

110 x 110 x 74 mm



T982S-901B

KL1501 LED Worklight
Flood Beam

- **12 - 24 V**
- 10 w
- Built-in Deutsch Plug

93 x 70 x 38 mm





WORKLIGHTS

NORDICLIGHTS

T902-112B

N200 Worklight

High Beam

- 24 V
- 65 w
- H3
- Clear Lens



NORDICLIGHTS

T983-001B

N70 LED

Wide or Flood Beam

- 24 V
- Tail
- Stop/Tail/Indicator Comb. Taillight



121 x 121 x 56 mm



NORDICLIGHTS

T984-302B/6

Scorpius N4404 LED Work Lights

Wide or Flood Beam

- 12 - 24 V
- 45 w
- Top-Top Pedestal
- Built-in Deutsch Plug
- Undampened



IP68
IP6K9K

106 x 108 x 87 mm



ICONIQ
Classic Engineering

T310012304

LED Worklight

Flood Beam

- 9 - 32 V
- 24 w
- 2 430 Lumens



IP67

116 x 60.3 x 138 mm

ICONIQ
ULTRA

Cube LED Work Lights

Spot or Flood Beam

- 10 - 30 V
- 40 w
- 3 000 Lumens

Unique design with detachable decoration plate available in blue, black, red or yellow.



81 x 78 x 76 mm

T040019748/7



IP67



SAFETY LIGHTS

ICONIQ
Classic Engineering

Red Zone LED Forklift Light

- 9 - 64 V
- 18 w
- Pedestrian Safety



186 x 88 x 61 mm

T720019729




MARKER LIGHTS

ICONIQ
Classic Engineering

T040004727

Marker Light

- 10 - 30 V
- Blue
- With Flashing and Static Functions
- With DT Plug

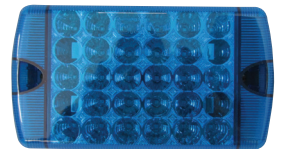

180 x 100 x 30 mm

HEADLIGHTS

ICONIQ
ULTRA

LED Headlight Set

- CREE LEDs
- 10 w
- 1 380 Lumens
- Glass Lens
- No Bezel
- Integrated high/low beam position and turn signal lights.

- Optional mounting includes bottom and rear.
- Its features make it perfect for bakkies, SUVs, ATVs, heavy-duty vehicles, and engineering machinery.



T310019738


IP65

E-MARK SAE DOT

Please contact our sales representatives for an



CONNECTOR KITS

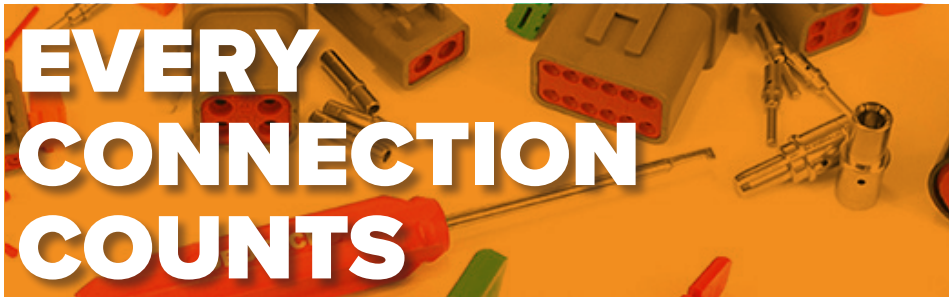

TE Connectivity Connectors offer different shapes, latching mechanisms, mounting styles, and materials to meet diverse application requirements and offer accessories to further expand the series' flexibility.


 <p>TDT042P-KIT DT2FKIT</p> <p>Deutsch 2-Way Female Connector Kit • DT Series</p> 	 <p>TDT062S-KIT DT2MKIT</p> <p>Deutsch 2-Way Male Connector Kit • DT Series</p> 	 <p>TDT043P-KIT DT3FKIT</p> <p>Deutsch 3-Way Female Connector Kit • DT Series</p> 
 <p>TDT063S-KIT DT3MKIT</p> <p>Deutsch 3-Way Male Connector Kit • DT Series</p> 	 <p>TDT044P-KIT DT4FKIT</p> <p>Deutsch 4-Way Female Connector Kit • DT Series</p> 	 <p>TDT064S-KIT DT4MKIT</p> <p>Deutsch 4-Way Male Connector Kit • DT Series</p> 
 <p>TDT046P-KIT DT6FKIT</p> <p>Deutsch 6-Way Female Connector Kit • DT Series</p> 	 <p>TDT066S-KIT DT6MKIT</p> <p>Deutsch 6-Way Male Connector Kit • DT Series</p> 	 <p>TDT0408PA-KIT DT8FKIT</p> <p>Deutsch 8-Way Female Connector Kit • DT Series</p> 
 <p>TDT0608SA-KIT DT8MKIT</p> <p>Deutsch 8-Way Male Connector Kit • DT Series</p> 	 <p>TDT0412PA-KIT DT12FKIT</p> <p>Deutsch 12-Way Female Connector Kit • DT Series</p> 	 <p>TDT0612SA-KIT DT12MKIT</p> <p>Deutsch 12-Way Male Connector Kit • DT Series</p> 



OPTICS



The Q2Smart Intelligent Camera – Your Ultimate Driving Assistant!

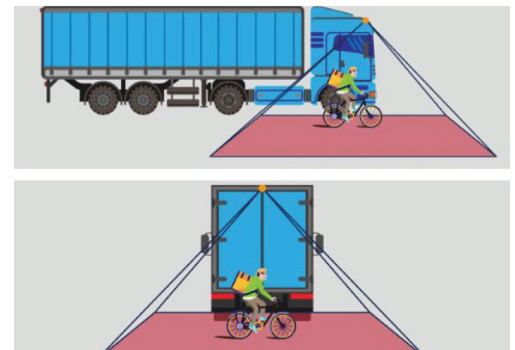

Perfect for large vehicles where visibility is critical.

Q2Smart Intelligent Pedestrian & Vehicle Detecting and Warning Camera.

This innovative system adopts deep-learning technology to accurately detect pedestrians and vehicles, ensuring realtime safety for drivers.

Features

- **Realtime Detection** – Detect pedestrians and vehicles (including cyclists and electric bikers) within 8m/10m in front of the vehicle.
- **Wide Viewing Angle** – With a 170°/200° horizontal viewing angle, it eliminates blind spots and provides a better view, helping avoid accidents.
- **Visual & Audio Alarms** – The camera works with a Q2Smart HD monitor to give realtime alarms, ensuring drivers are always aware of potential risks.
- **Durable & Reliable** – IP69K waterproof, ISO 16750-3 anti-vibration, and built to withstand the toughest environments.
- **Easy Setup** – With USB2.0 support and the ability to configure via mobile or USB flash drive, setup is hassle-free.



Enhance Safety with the Q2Smart 360° Camera View & Pedestrian Detection System!



Upgrade your fleet's safety with the Q2Smart 360° Camera View & Pedestrian Detection System—a game changer for buses, trucks, ambulances, and limousines! This cutting-edge system provides a true panoramic bird's-eye view, eliminating blind spots and ensuring maximum driving safety.

Why Choose Our 360° Camera System?

- **Seamless 360° Coverage:** Enjoy a bird's-eye view with no blind spots for safer driving.
- **Flexible Viewing:** Switch between 3D/2D views for complete control of your environment.
- **AI-Powered Pedestrian Detection:** Detect pedestrians up to 10 metres away with our external AI camera system.
- **Night Vision Capability:** See clearly even in low light conditions, with no infrared required.
- **Rugged Durability:** Waterproof, dustproof, and built to withstand harsh conditions.



Please contact our sales representatives for an



PRE-CLEANERS



Series 9000 Pre-cleaner Powerful Ejective Technology
Increased Filter Life Means Decreased Maintenance Downtime

Air filter life is directly related to the amount of debris ingested through an engine's air intake. Installing a Sy-Klone Series 9000® Air Pre-cleaner as the first stage of an air intake system prevents the majority of heavier-than-air particles from entering the system. This results in longer air-filter life, more efficient engine performance, and decreased maintenance expenses.

Series 9000 Models



Air Flow Range: Nine models in sizes 2" to 8" range from 10 - 1 400 CFM (0.28 - 39.64 m³/m) and much higher with multiple-unit installations.

Mounting & Equipment Types: Mounts on all vertical and horizontal air-cleaner housings, on all machines, replacing tube-body systems or internal pre-cleaners.

Maintenance: Self-cleaning & routine maintenance-free.

Applications: Off-road conditions, construction, mining, forestry, waste, agriculture, military, and more.

Debris Types: Expels all types of mixed debris, including mud, snow, rain, leaves, sawdust, chaff, and dust. Heavier debris requires additional heavy debris screen, and Ag Screen is extremely effective against chaff.

REALTIME MONITORING



LOAD MEASURING



ONBOARD WEIGHING TECHNOLOGY
PRECISION LOADING THAT OPTIMISES PRODUCTIVITY!

Every load costs energy, fuel, and time — and guessing the weight can cost even more. With smart onboard weighing and payload management, operators gain real control over every movement, reducing haulage costs and boosting productivity across the fleet. Optimised Loads = Optimised Profit



User-Friendly

Designed with operators in mind — it speaks your language, follows your workflow, and delivers exceptional results because it was designed by real users like you.



Fast

Intuitive navigation designed by people who understand the job. No second-guessing — just quick access, clear actions, and a tool that works as fast as you do.



Simple

Built on a modular platform, it adapts as your needs evolve. Upgrade and configure it easily to match your work, not the other way around.



millennium 5

Entry-level onboard weighing for production monitoring and optimal loading.



helper M

Limited-level onboard weighing for the safety of optimal loading. Simple to use, robust, and essential.



helper XE

Advanced-level onboard weighing with CANbus technology for production, handling, and sales monitoring.



helper X

Advanced-level onboard weighing for production, handling, and sales monitoring.



EMPOWERING YOUR FLEET WITH UNRIVALLED TELEMATICS SOLUTIONS.

Detect tyre issues before they become failures.

ATLAS TPMS delivers real-time visibility into your fleet, allowing you to track vehicles and machinery anytime, anywhere in the world. Enjoy the simplicity of a single, dependable platform that combines tracking, security, wheel loss detection, engine monitoring, and axle load monitoring into one seamless solution.

This TPMS allows tyre monitoring without removing tyres

or taking vehicles out of operation for long periods. TPMS sensors can be quickly attached to tyre valves in minutes, making it an ideal solution for fast, aftermarket installation across an entire fleet.

Any tyre, any machine, any vehicle, any brand, any market, this is a TPMS solution that does not tie you down or limit you.

MAXIMISE UPTIME. MINIMISE TYRE FAILURES.

KEY BENEFITS



Extended Tyre Life



Reduced Fuel Consumption



Increased Safety



Reduced Downtime



Better Use of Resources



Increased Compliance



Reduced Maintenance



Reduced Waste

BOOK A DEMO TODAY!

Discover how **ATLAS ADVANCED TPMS TELEMATICS** can reduce costs, improve safety, and increase fleet performance.

Eastern Cape - Port Elizabeth
T: +27 (0)82 450 6596

Free State - Bloemfontein
T: +27 (0)63 257 0505

Gauteng - Bedfordview (FleetTech)
T: +27 (0)10 329 0932

Gauteng - Jet Park (HQ)
T: +27 (0)11 823 5650

KwaZulu Natal - Pinetown
T: +27 (0)31 303 4129

Mpumalanga - Middelburg
T: +27 (0)13 692 8132

Northern Cape - Kathu
T: +27 (0)53 723 3415

North West - Rustenburg
T: +27 (0)14 596 5257

Western Cape - Cape Town
T: +27 (0)21 945 1453

Botswana - Gaborone
T: +267 399 4150

Mozambique - Tete
T: +258 252 20666

Zambia - Kitwe
T: +26 (0)21 222 5338